

Multi-Room Extract System

Whole house ventilation



This highly efficient extract system provides controllable ventilation in houses with up to five rooms, including the bathroom and kitchen. Moist air is extracted at source as well as from any other rooms where steam may have escaped to.

The powerful yet exceptionally quiet unit eliminates the need for multiple fans and needs only one outlet. It is unobtrusive, simple to operate and offers low running costs.

Normally installed in the loft or a ceiling void the MRES is easy to fit and can be adapted to suit most types of housing.

The MRES complies with Building Regulations and is guaranteed for two years.

Special Features

- Easy to install
- Can be wired for two speed operation
- Two speed ball bearing motor ensures long service life

General

- 80mm inlets supplied for bathroom
- 125mm inlets supplied for kitchen
- System is balanced with fan spigots fitted with flow regulators
- Can be fixed to joists or suspended to minimise noise

Benefits

- Low running cost
- Exceptionally quiet operation
- Complies with Building Regulations (BRE Digest 395)
- Powerful extraction boost removes moisture and odours on demand at critical times
- Adaptable for different installations
- Guaranteed for two years



Please note the MRES removes air and provision should be made to balance the airflow by making provision for the supply of replacement air.

Multi-Room Extract System

Whole house ventilation


Technical Data

Description	Extract performance			Power W	Weight kg	Electrical Specification
	l/s	m ³ /hr	cfm			
Multi-Room Extract System Two speed operation						
Low Speed	58	210	122	27	2.4	220 - 240V~50 Hz
High Speed	103	370	216	90	2.4	220 - 240V~50 Hz



The unit's internal fan system is of the external rotor motor type which is designed for durability coupled with low maintenance. Although the impeller generates high pressure to overcome duct resistance, indoor noise levels are barely audible.

The MRES is supplied as a stand alone unit or with an installation kit (MREK) including:

- 4 x 6m lengths of 80mm diameter flexible PVC hose
- 2 x 6m lengths of 125mm diameter flexible PVC hose
- 4 x 80mm diameter inlet (white)
- 1 x 125mm diameter inlet (white)
- Suspension cord
- Installation instructions
- Energysaver cowl

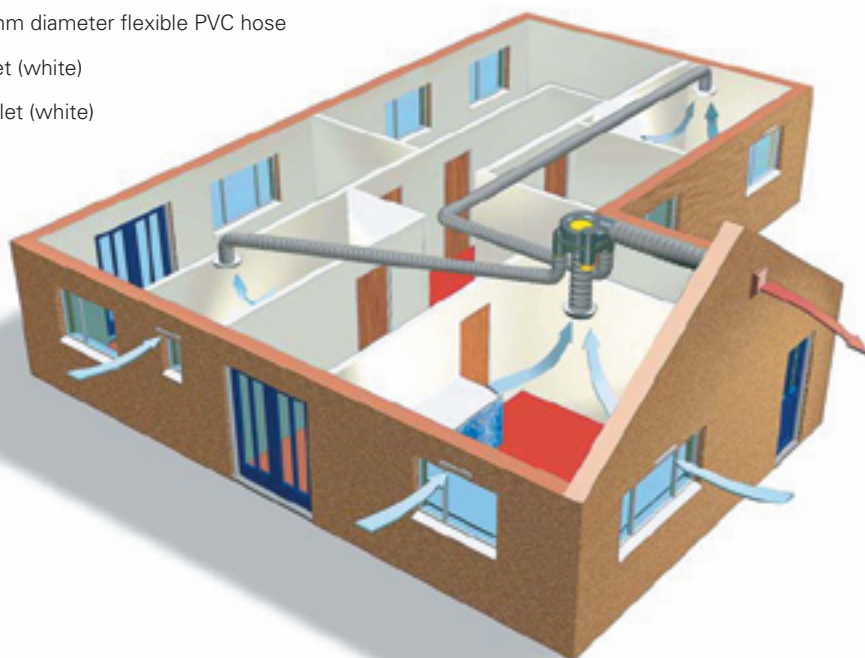

EnergySaver™ Cowl

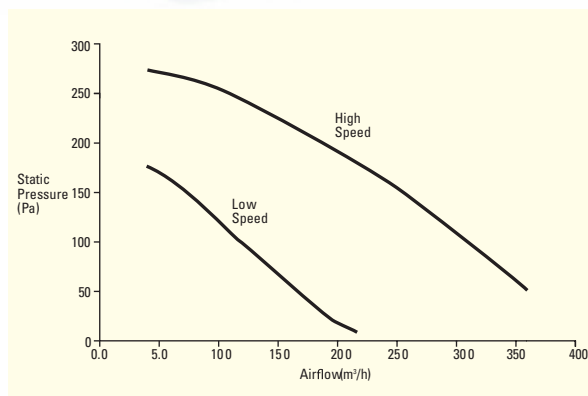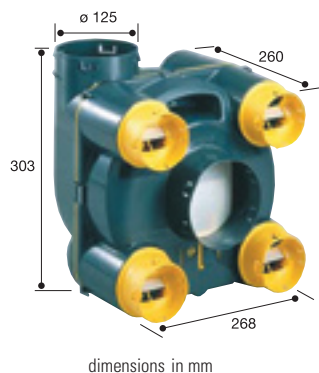

ORDER CODES

MRE Multi-room extract system

MREK Multi-room extract system
with installation kit



HEAD OFFICE

Stathe Road
Burrowbridge
Somerset, TA7 0RY
Tel: 01823 690292 Fax: 01823 690291
Email: info@airtechaunton.co.uk
www.airtechenvironmental.co.uk

LONDON & SOUTH EAST REGION

Suite 2, First Floor, Cadogan House,
36 Central Avenue, West Molesey,
Surrey, KT8 2QZ
Tel: 020 8941 8722 Fax: 020 8941 9623
Email: info@airtechlondon.co.uk
www.airtechenvironmental.co.uk

SOUTH WEST REGION

Unit 2 Halwin Industrial Estate
Porkellis, Helston
Cornwall, TR13 0LA
Tel: 01326 341 423 Fax: 01326 341 467
Email: info@airtechaunton.co.uk
www.airtechenvironmental.co.uk